






Data Sheet

FEM1.001-A3

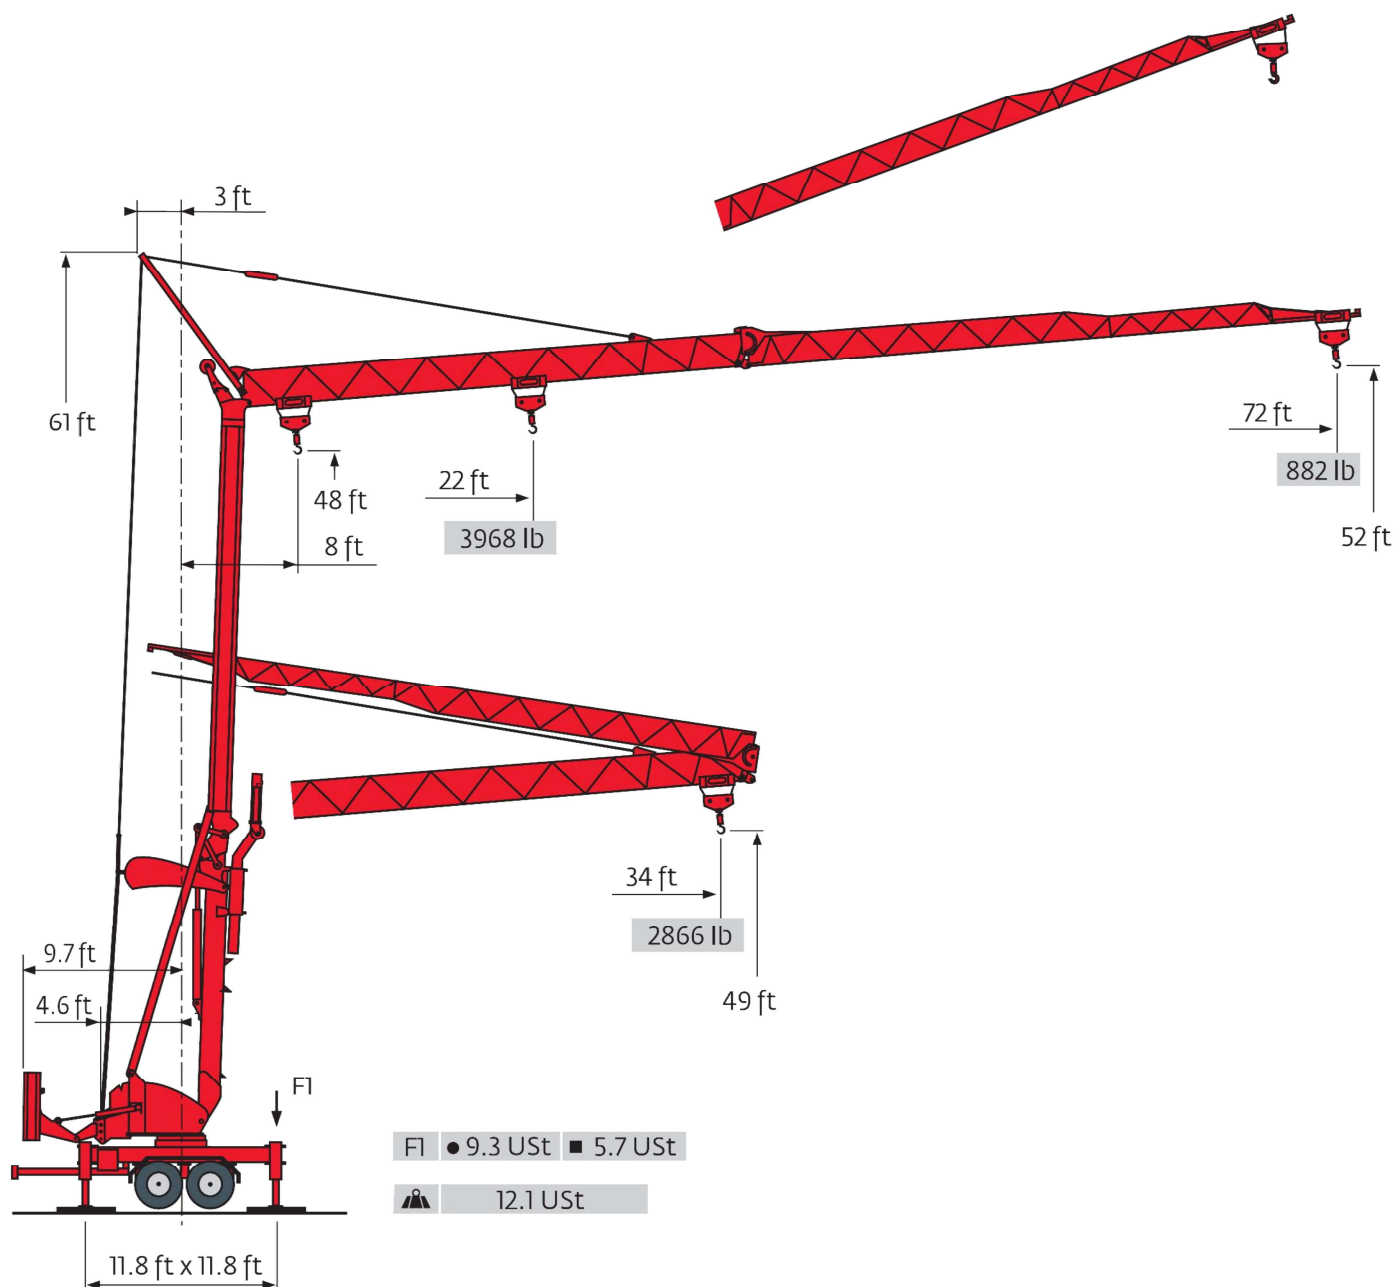

Values have been rounded

Load charts

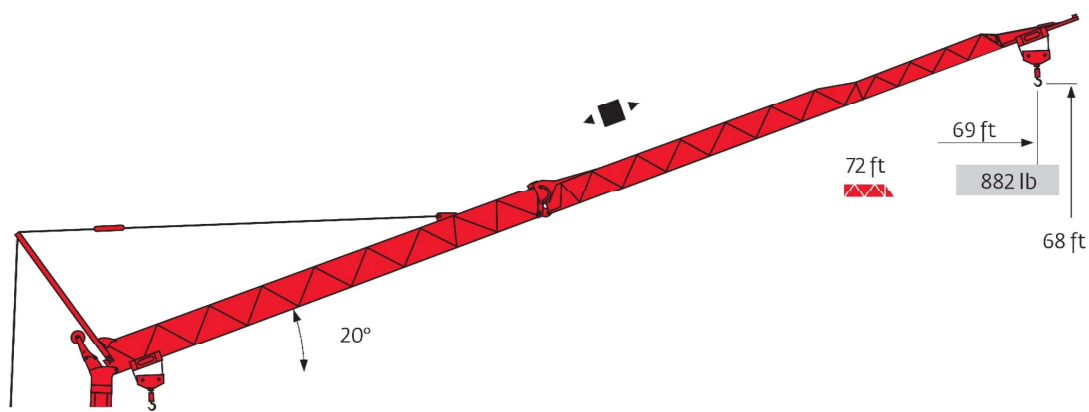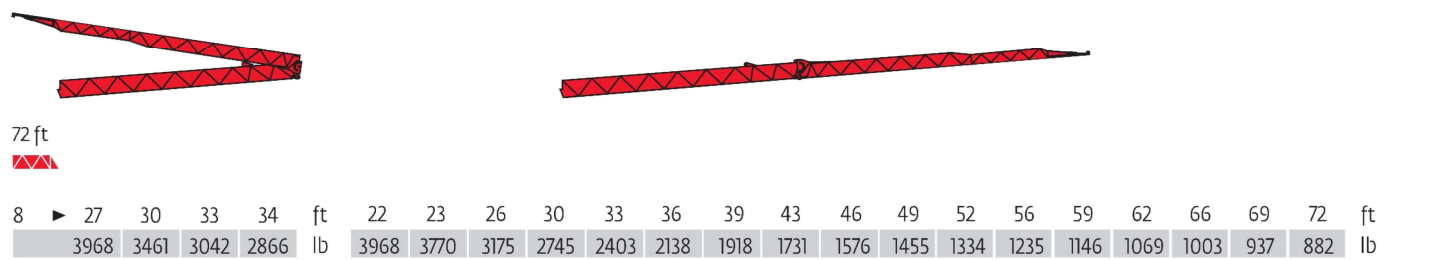

 Traversing trolley


 Reactions in service

 Reactions out of service


 Without load, ballast (or transport axles), with maximum jib and maximum height

Mechanisms


							hp	kW
	8 LVF 9 Optima	220 V 	fpm	↑ 12 ↓ 12	↑ 23 ↓ 53	↑ 60 ↓ 119	3.3	2.4
		21 A 	lb	3968		1543		
		220 V 	fpm	↑ 12 ↓ 12	↑ 37 ↓ 52	↑ 83 ↓ 119	5.2	3.8
		34 A 	lb	3968		1543		
	480 V 	fpm	↓ 12		↓ 53		7.5	5.5
		lb	3968		1543			
	1 DVF 4	—	fpm	46 - 92			1.5	1.1
	RVF 20	—	rpm	0 → 1			1.5	1.1
								
220 V(+6% -10%) 60 Hz  480 V(+6% -10%) 60 Hz				220 V 21 A: 2.4 kW 220 V 34 A: 3.8 kW 480 V: 14 kW				

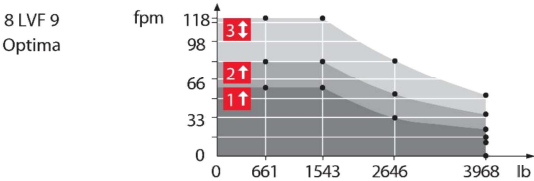

Crane profile

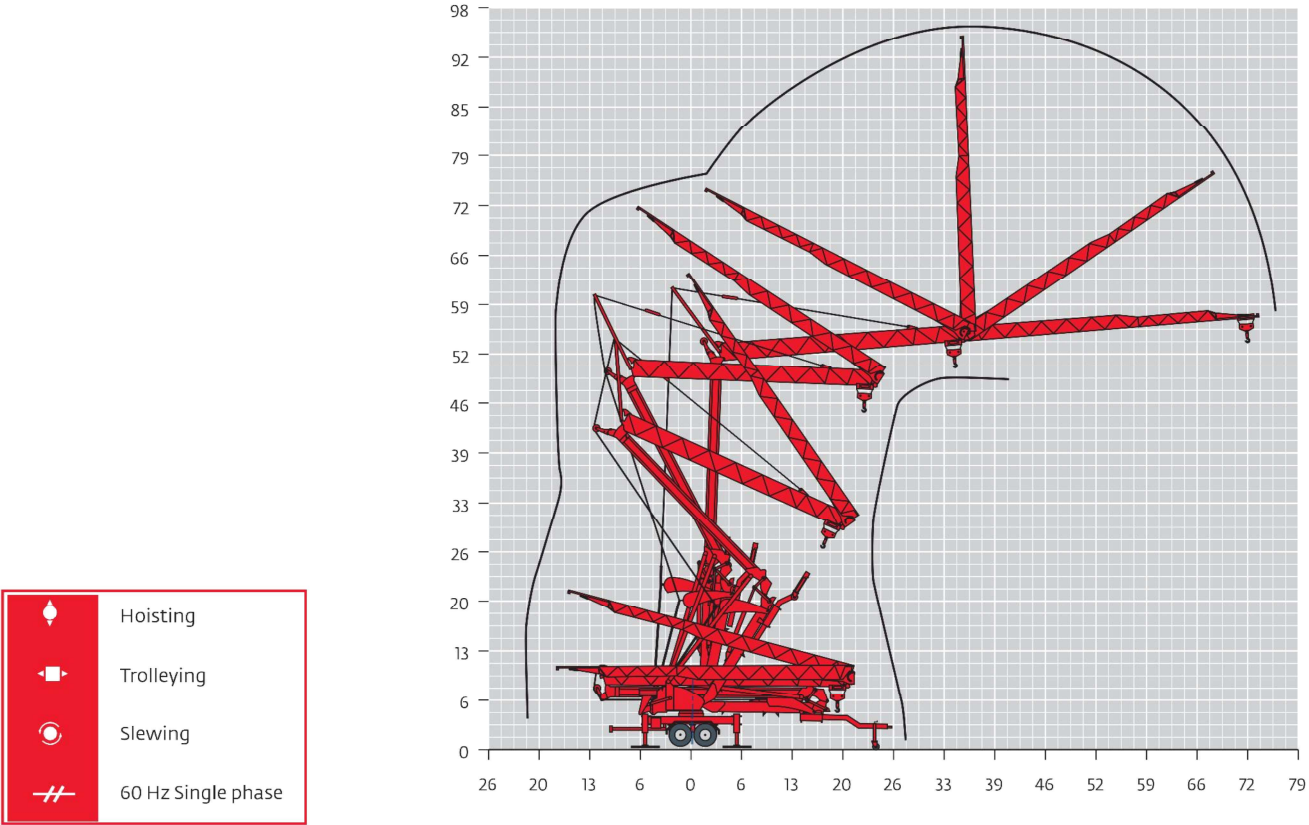

Transport

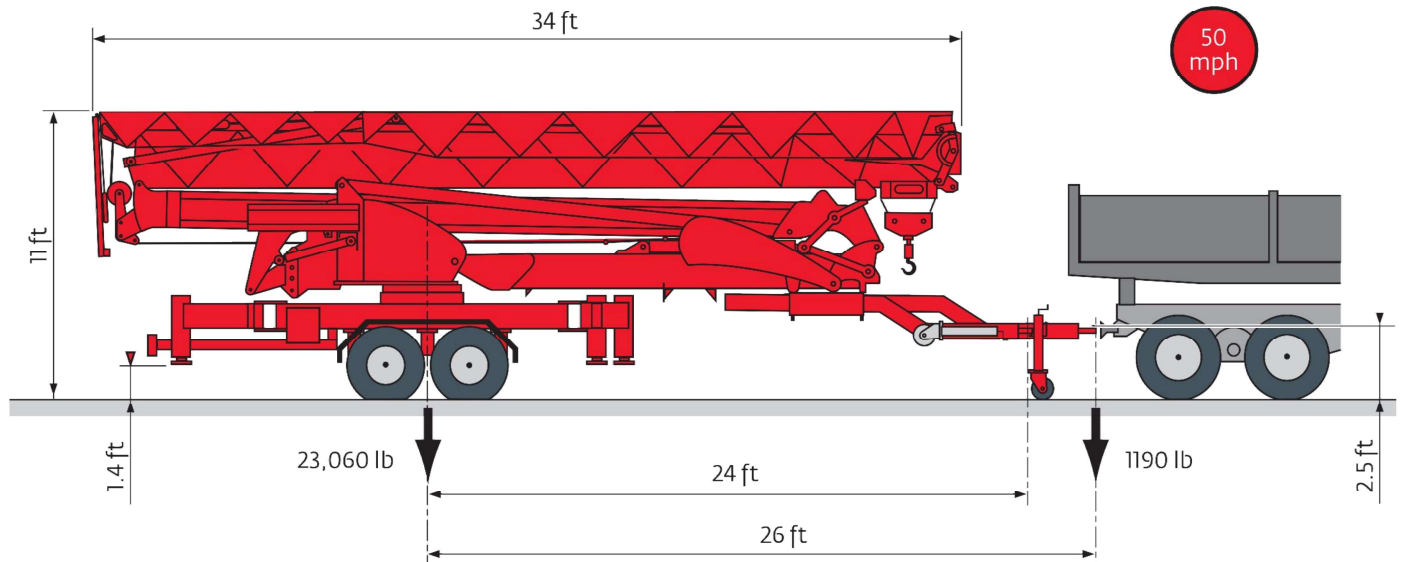

Rocky Mountain Crane & Equipment Rental
PO Box 2888 McCall, ID 83638
(208) 696-1476 Ph. / (866) 756-0090 Fax
www.rockymtncranes.com

Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment and price changes without notice. Illustrations shown may include optional equipment and accessories, and may not include all standard equipment.



www.manitowoc.com

Regional Headquarters

Americas

Manitowoc, Wisconsin, USA
Tel: +1 920 684 6621
Fax: +1 920 683 6277

Shady Grove, Pennsylvania, USA
Tel: +1 717 597 8121
Fax: +1 717 597 4062

Europe, Middle East, Africa

Ecullly, France
Tel: +33 472 18 2020
Fax: +33 472 18 2000

Asia - Pacific

Shanghai, China
Tel: +86 21 6457 0066
Fax: +86 21 6457 4955

Potain Igo MA13
Code 04-020-2M-I209